



889 F
LAMPADA PORTATILE FLUORESCENTE
FLUORESCENT INSPECTION LAMP



IT


CARATTERISTICHE :

Lampada fluorescente senza cavo resistivo, non protetta contro i rischi di esplosione, con accensione elettronica senza starter.

TENSIONE NOMINALE = 220 V – 50 Hz
TUBO A GAS LUMINOSO = 8 W
TEMPERATURA MASSIMA DI UTILIZZO = 35° C

SOSTITUZIONE DELLA LAMPADA:

- Assicurarsi che la lampada non sia sotto tensione
- Togliere il cappuccio superiore e sfilare il portatubo dall'impugnatura
- Togliere il fermo e ruotare la lampada
- Sostituire la lampada ed eventualmente il fusibile se fuori uso

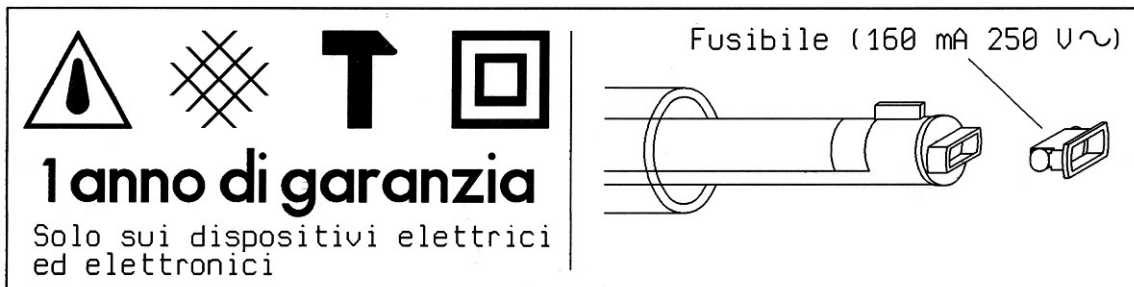

GB


CHARACTERISTICS :

Fluorescent inspection lamp without resistive cable, not protected against burst risks, electronic ignition without starter.

RATED VOLTAGE = 220 V – 50 Hz
FLUORESCENT BULB = 8 W
MAX WORKING TEMPERATURE = 35° C

BULB REPLACEMENT:

- Be sure that the lamp is not live
- Take away the top cap and extract the bulb holder from the handle
- Take away the retainer and rotate the bulb
- Replace the bulb and, if unserviceable, replace the fuse

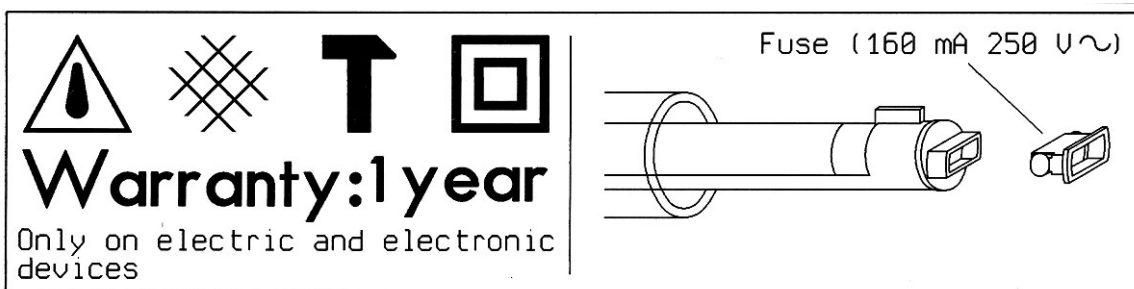

Cod.Y802257 - 20/03/06