



## 272 EX

• To be inserted on the head of the locking nuts and screw with swivel ring after drilling with bits 272 P


• Extractors with hexagonal connection tested to withstand over 150 Nm (well beyond the tightening torques declared by the manufacturers locking nuts or screws)

## **Family details**

Code	L mm	Real and the second sec
U02720004	75	1

## Sets / Compositons

## **Articles**

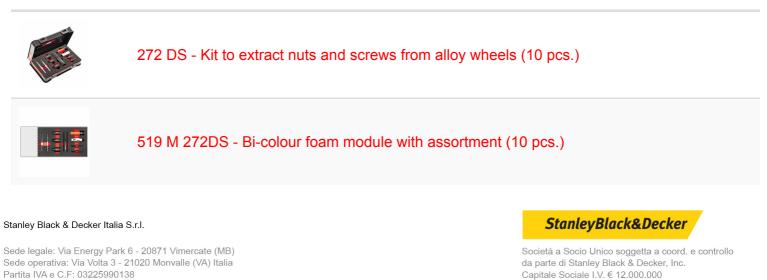

Le informazioni e le immagini qui contenute sono soggette a continuo aggiornamento: tali dati sono pertanto da ritenersi indicativi e suscettibili di eventuali errori e/o imprecisioni. Stanley Black & Decker Italia S.r.I. declina ogni responsabilità circa le informazioni e le indicazioni ivi contenute.